

TB BALL BEARINGS WITH TEXTILE CAGE

Ball bearings are characterized by very durable construction, their installation is simple, fast, and requires no special tools. The bearings are used for bearing spindles of machines with increased speed.

Our bearings are distinguished by the fact that they have an oil-soaked textile cage guided on the inner ring, which ensures the quiet running of the bearing.



Characteristics:


Ball bearings with a textile cage. Cage guided on the inner ring. C3 clearance.

Application:

For bearing the spindles of high-speed machines.

Delivery status:

Not lubricated. Protected by maintenance oil, packed in corrosion inhibited anti-corrosion paper.

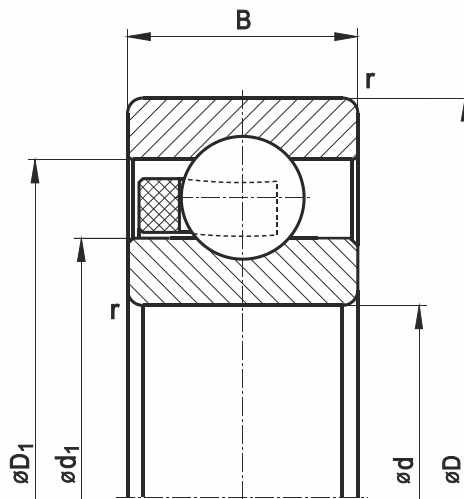

Designation	Dimensions					
	d	D	B	d ₁	D ₁	r
	mm	mm	mm	mm	mm	mm
6006 TB	30	55	13	34	50	1
6306 TB		72	19	36	65	1,1
6007 TB	35	62	14	39	57	1
6207 TB		72	17	42	65	1,1
6307 TB		80	21	42	71	1,5
6008 TB	40	68	15	44	63	1
6208 TB		80	18	47	73	1,1
6308 TB		90	23	47	81	1,5
6009 TB	45	75	16	49	70	1
6209 TB		85	19	52	78	1,1
6309 TB		100	25	52	91	1,5
6010 TB	50	80	16	54	75	1
6210 TB		90	20	57	83	1,1
6310 TB		110	27	60	100	1,5
6011 TB	55	90	18	60	84	1,1
6211 TB		100	21	62	91	1,5
6311 TB		120	29	65	110	2
6012 TB	60	95	18	65	88	1,1
6212 TB		110	22	67	101	1,5
6312 TB		130	31	72	118	2,1
6213 TB	65	120	23	82,5	102,5	2,5